



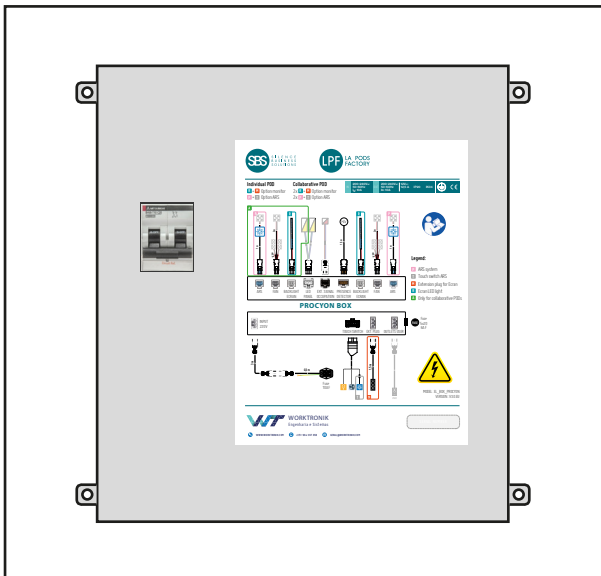


DIMENSIONS

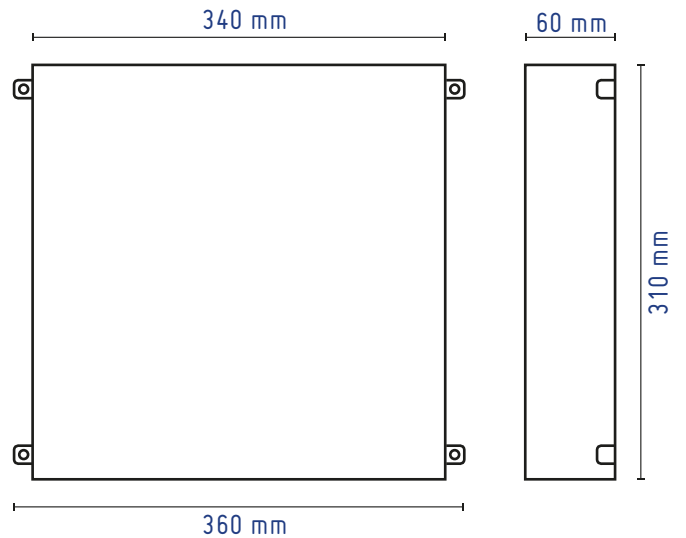

SPECIFICATIONS

POWER SUPPLY	200~240V _{AC} (EU Version) 100~120V _{AC} (US Version)
AC OUTPUT	200~240V _{AC} / 10A (EU Version) 100~120V _{AC} / 10A (US Version)
DC OUTPUT	12V _{VDC} / 12,5 A
POWER*-individual pod	Stand by : 15W MAX : 113W (without ARS : 43W)
POWER*-collaborative pod	Stand by : 15W MAX : 210W (without ARS : 70W)
NOMINAL CURRENT	10A
FREQUENCY RANGE	47 ~ 63Hz
IP	20
IK	04
STANDARDS	IEC61439-1 IEC61439-3
OPERATING TEMPERATURE	-10 ~ 45°C (14 ~ 113°F)
STORAGE TEMPERATURE	-20 ~ 65°C (-4 ~ 149°F)
OPERATING HUMIDITY	20 ~ 90% RH (non-condensing)
STORAGE HUMIDITY	0 ~ 95% RH (non-condensing)

BLOCK DIAGRAM

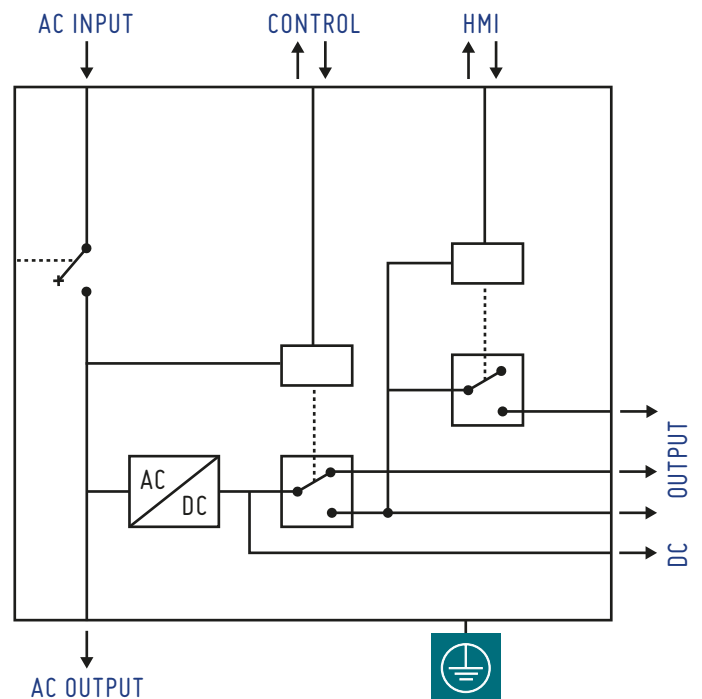

*Without connected appliances on socket or USB charger

DATASHEET

WT WORKTRONIK
Engenharia e Sistemas

WWW.WORKTRONIK.COM

GERAL@WORKTRONIK.COM

EL_BOX_PROCYON
Version 2.xx